




Engineered for transferring highly concentrated and aggressive liquids. Robust PVDF offers excellent durability and chemical resistance.

Technical Specifications

- Package Includes:**..... Motor, Pump Tube, Hose, Wall Bracket, Barrel Adapter & Hand Nozzle
- Motor Type:**..... 230V, 650 W, IP54, Variable Speed Drive
- Pump Tube Material:**..... PVDF, Hastelloy C-276, Carbon Graphite
- Immersion Length:**..... 39" (1000 mm) or 47" (1200 mm)
- Discharge Hose:** Chemical / ATEX hose, 1,8 m, 1"(25 mm) I.D.
- Hand Nozzle Material:** PVDF, Viton
- Maximum Flow Rate:** 67 L/min *Based on Water*
- Maximum Viscosity:** 1500 cps (mPas)
- Maximum Temperature:** 80° C
- Shipping Weight:** 9,97 kg

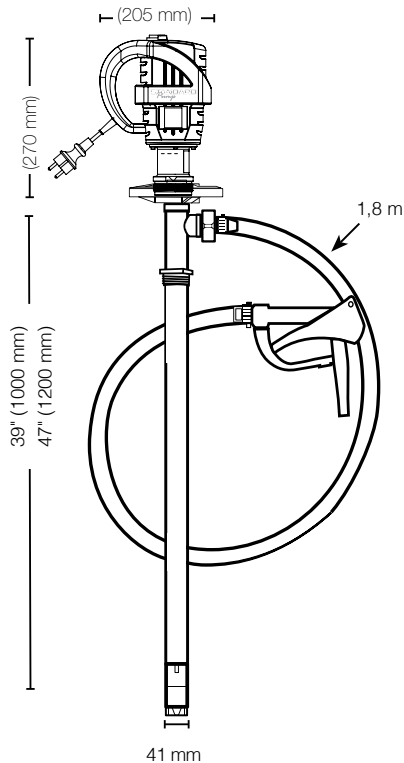

DRUM & IBC tanks

Package P/N	Motor	Power	Pump Tube
9580	SPE-650V	650 W	SP-PVDF-39
9581	SPE-650V	650 W	SP-PVDF-47

 **Warning:** This pump is not suitable for use with Flammable/Combustible liquids.
*Note: When pumping viscosities over 1,000 cps, pump must be used intermittently to avoid potential premature failure and/or damage.