


SLOW RETRACTION SYSTEM BK HOSE REEL(SAFETY BRAKE) ASSEMBLY

A new innovative system to reduce the speed of uncontrolled automatic hose reel.
Just ask to receive hose reel with “SLOW RETRACTION SAFETY BRAKE SYSTEM BK”, it will be equipped with an innovative system that will reduce the retracting speed of the reel.



If you have to install the BK system in hose reel BKP with hose, you have to follow these instructions. This procedure must be done by well prepared technical people with proper personal safety devices.

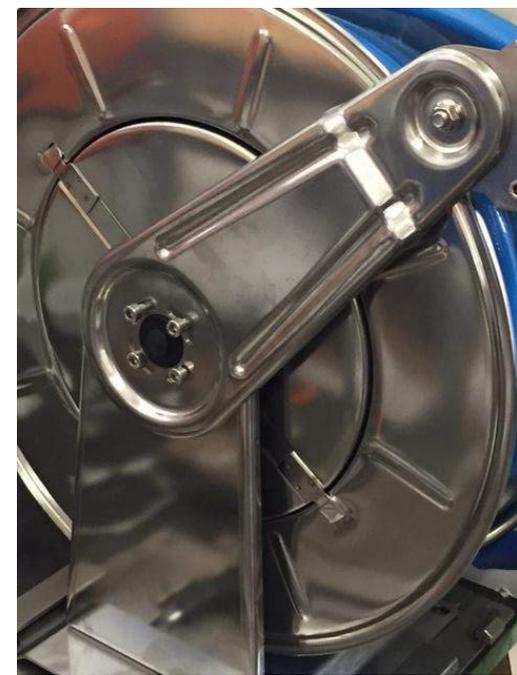

Take out the hose bumper.



Hose reel must be positioned with ratchet armed and fixed on rack.



Let the reel rotate and download the spring charge (obviously control the rotation)



Take out the plastic plug with a screw driver.



Take out the 4 screws with proper allen key



Fix the adapter with the 4 screws just dismantled



Please note
milling position.



Push the adapter
letting it connect
to the reel.



Insert the
central
adapter.



Put the
stainless
steel+EPDM
frame.





Put the brake on connection shaft.

Put the brake on vertical position. With adjusting screw up (adjusting screw indicated by arrow).

Insert the four screws.






Tighten the four screws.

You receive the brake already tested!

In case you absolutely need to adjust the speed return of the hose just turn, every time only few degree, the small screw with hexagonal seat (indicated by arrow). Make a test after every small turn.

In case of accidental dismounting of the regulation of screw and leaking of oil, the system must return to RAMEX to be fixed up.

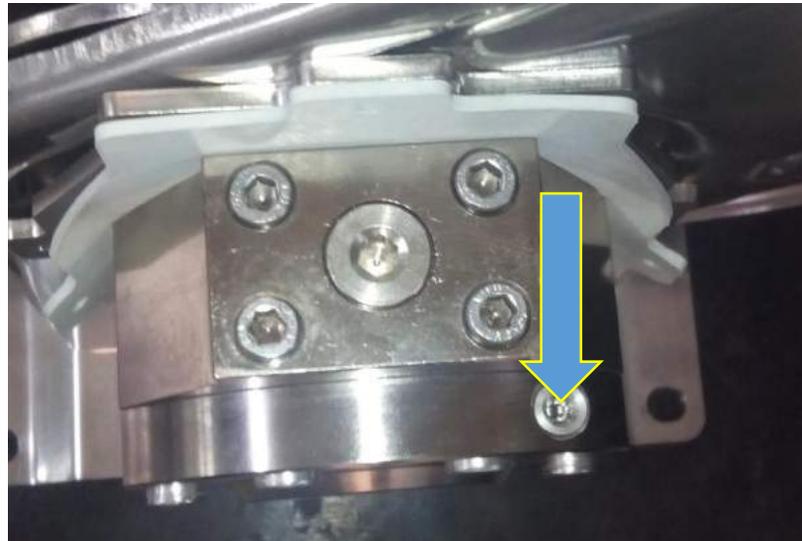



Put the external frame
over the EPDM cover.



Insert the screw.



Fix the external frame adapter then tighten the four screws.

