



KITS



PUMPS



METERS



METERED NOZZLES



NOZZLES

WASTE OIL
EQUIPMENTS

K33

FEATURES

- **READY TO USE**
- **INDUSTRIAL DESIGN**
- **NO BATTERY NEEDED**
- **EASY TO RESET**
- **VERSATILE**

PIUSI K33 is the most successful mechanical flowmeter on the market. Reliable, easy to install and calibrate, it is equipped with a nutating disc that allows it to be installed in all four flow directions. The display is available in three digits.

PERFORMANCE

UP TO 20-120 L/MIN	UP TO 30 BAR
FLOW RATE	BURSTING PRESSURE
± 1%	0,2%
ACCURACY	REPEATABILITY



K33

PACKAGING

CODE	WEIGHT		PACKAGING			
	KG	LBS	MM	INCH	PCS/PALLET	PCS/BOX
K33 METER						
000550160	2,06	4,55	180X180X170		-	1
000551160	2,06	4,55	180X180X170		-	1
000557000	2,06	4,55	180X180X170		-	1
000558000	2,06	4,55	180X180X170		-	1



FILTRATION



FLUID
MONITORING



TANK
MONITORING



HOSE REELS



ACCESSORIES



MERCHANDISE



AIR



ANTIFREEZE



AdBlue®



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL




WATER




WINDSCREEN

CHART

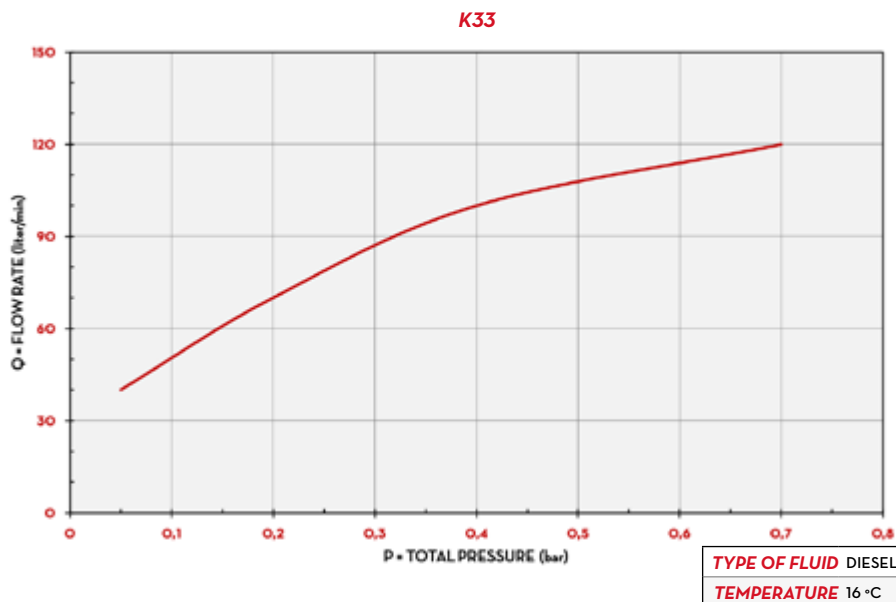

DIMENSIONS

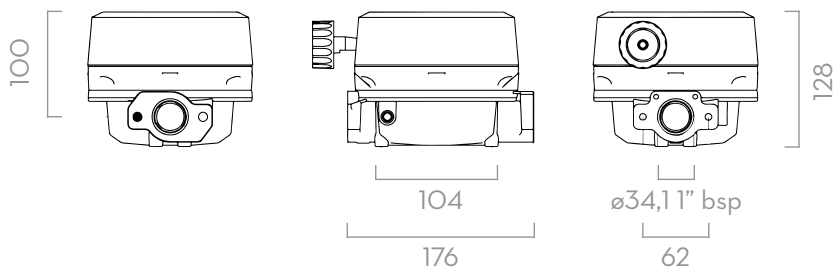

Dimensions expressed in millimeters

IN THE BOX

- K33 METER
- INSTRUCTION MANUAL

DETAILS



NUTATING DISK SYSTEM



4 FLOW DIRECTIONS



MECHANICAL COUNTER

MATERIALS

- NUTATING DISK CHAMBER: TECHNOPYLIMER
- BODY: ALLUMINIUM

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	FLOW DIRECTION	FLOW RATE		WORKING PRESSURE		PULSER	INLET OUTLET
				L/MIN	GPM	BAR	PSI		
K33 METER									
000550160	K33 VER. A			20-120	5-32	10	142	YES	1" BSP
000551160	K33 VER. B			20-120	5-32	10	142	YES	1" BSP
000557000	K33 VER. C			20-120	5-32	10	142	YES	1" BSP
000558000	K33 VER. D			20-120	5-32	10	142	YES	1" BSP

UPON REQUEST AVAILABLE IN NPTF VERSION AND DISPLAY IN GALLON/QUARTER OR PINT