



CAR FILLING

FUEL MANAGEMENT
SYSTEMS

KITS



PUMPS



METERS



METERED NOZZLES

CUBE ADBLUE AGILIS

FEATURES

- MULTI-USER MANAGEMENT
- 3D FILTER AVAILABLE
- COMPACT DESIGN
- COMPATIBLE WITH SSM AGILIS SOFTWARE
- IP55

CUBE ADBLUE AGILIS is a private dispenser designed to simplify the transfer, dispensing, and monitoring of AdBlue® safely and reliably. Compact and modern, it is equipped with a self-priming membrane pump with a flow rate of 30 l/min, ideal for quick and efficient use. The patented SB325_X automatic nozzle with break-away system ensures safety and precision, while the specific 3D filter guarantees impurity-free dispensing. The 6-meter delivery hose provides great operational flexibility, and the integrated microswitch automatically turns off the pump when the nozzle is placed back, ensuring convenience and safety.

PERFORMANCE

UP TO
30 L/MIN

FLOW RATE

UP TO
250

USERS

±1%

ACCURACY

AC

VOLTAGE



CUBE ADBLUE AGILIS

(THE 3D FILTER IS AVAILABLE AS NEEDED.)



PACKAGING

CODE	WEIGHT		PACKAGING		N. BOXES/EUROPALLET	
	KG	LBS	MM	PCS/BOX		
FO0594A00	22	48,5	380X380X480	1	12	24



NOZZLES



FILTRATION



TANK MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE



AIR



ANTIFREEZE



AdBlue®



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL




WATER



WINDSCREEN

DIMENSIONS

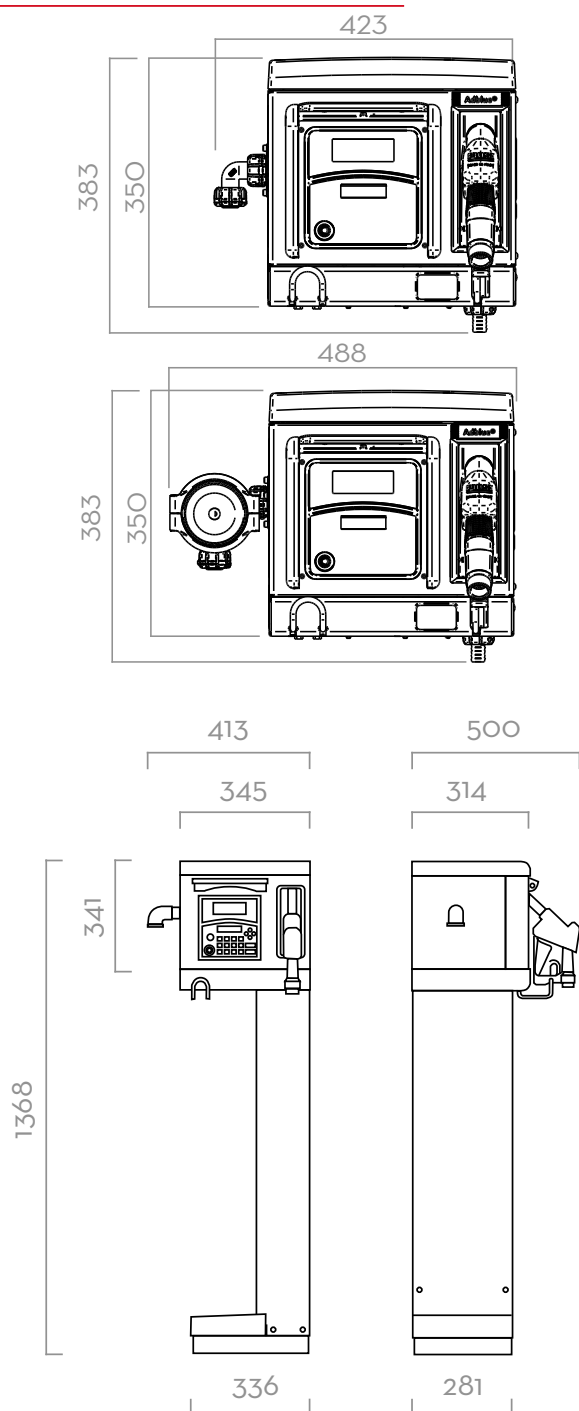


Dimensions expressed in millimeters

IN THE BOX

- DISPENSER CUBE MC ADBLUE
- 3D FILTER AVAILABLE
- DELIVERY HOSE
- AUTOMATIC NOZZLE SB325_X

DETAILS



COMPONENTS

- PUMP:
SUZZARABLUE PUMP AC
- METER:
K24 PULSER
- NOZZLE:
SB325_X
- FILTER:
3D FILTER

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	FLOW RATE		VOLTAGE			PUMP	METER	NOZZLE	INLET	DELIVERY HOSE	
			L/MIN	GPM	AC V/HZ DC VOLT	POWER WATT	AMP. MAX.					LENGTH	Ø
FO074400B	CUBE ADBLUE MC 230V/50HZ 250U AGILIS	Ad W	30	7,9	230/50	400	1,95	SUZZA- RABLUE PUMP	K24 PULSER	SB325_X	3/4"	6 M	3,4"