



FUEL MANAGEMENT
SYSTEMS



DISPENSERS



KITS



PUMPS



METERS



NOZZLES

E200

FEATURES

- **ROBUST, COMPACT AND RELIABLE DESIGN**
- **INTEGRATED BYPASS VALVE**
- **TESTED FOR CONTINUOUS OPERATION**
- **IP55**

The PIUSI E200 is a self-priming rotary vane electric pump designed for diesel transfer applications. Ideal for dispensing and transferring diesel from tanks as well as for mobile installations, it ensures reliable performance in a wide range of operating conditions. The pump is equipped with a self-ventilated asynchronous induction motor and features a compact cast iron body with anti-corrosion treatment. The sintered steel rotor and technopolymer vanes guarantee durability, efficiency and long service life, making the E200 a dependable solution for professional diesel handling.

PERFORMANCE

UP TO
200 L/MIN

FLOW RATE

**230/240V
50HZ**

POWER

3 BAR

BYPASS PRESSURE



E200



PACKAGING

CODE	WEIGHT		PACKAGING		
	KG	LBS	MM	INCH	PCS/BOX
FO0326AOA	18	39,6	450X200X250	17,7X7,8X9,8	1



FILTRATION



TANK MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE

PIUSI

ANY BIODIESEL



AIR



ANTIFREEZE



AdBlue®



HVO/XTL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



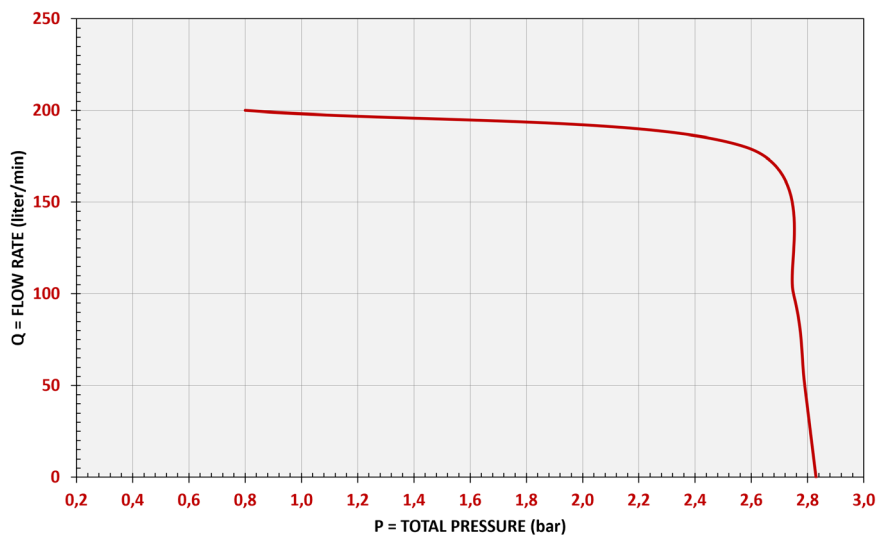
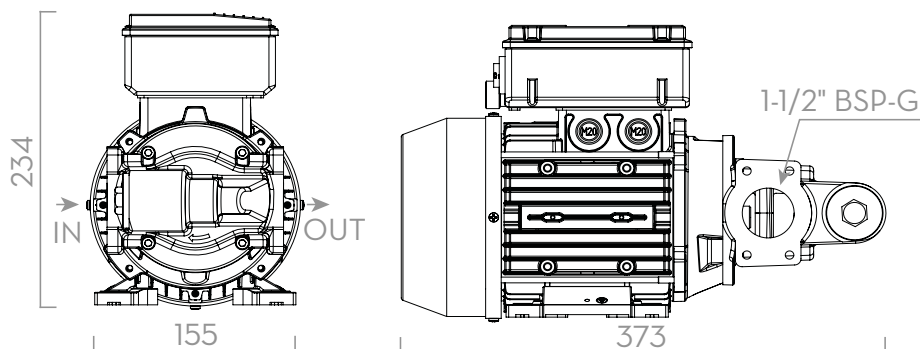
OIL



WATER



WINDSCREEN

CHART**E200****TYPE OF FLUID** DIESEL**TEMPERATURE** 25°C**DIMENSIONS***Dimensions expressed in millimeters***IN THE BOX**

- E200 PUMP
- INSTRUCTION MANUAL

DETAILS

ON/OFF SELECTOR



POWER CABLE



ROTARY VANES



REMOVABLE FEET

MATERIALS

- BODY: CAST IRON
- IMPELLER: SINTERED STEEL
- SEAL: NBR
- SHAFT: STEEL

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	FLOW RATE		VOLTAGE			CONNECTION INLET/OUTLET BSP	BYPASS PRESSURE	NOISE LEVEL dB
			L/MIN	GPM	AC VOLT/HZ	POWER WATT	AMP. MAX.			
FOO326AOA	E200 230V/50HZ		200	53	SINGLE-PHASE 230/240 - 50 HZ	2000	10 A	1-1/2"	3 bar	> 85