

AQUAFIGHTER

ConidiaBioscience

Aquafighter® KEEPS DIESEL FUEL WATER-FREE FROM INSIDE THE TANK

- Long-term & short-term savings on maintenance and capital equipment
- Demulsifies diesel & biodiesel blends by maintaining water level within fuel specification in the tank at all times
- Protects fuel tank from microbial growth, corrosion and other related damages due to water accumulation
- Non-toxic, safe to handle and safe for the environment
- Stops the domino-effect of water damage from the tank through the fuel system to the engine
- Manages fuel-quality and fuel tank condition better than other solutions combined

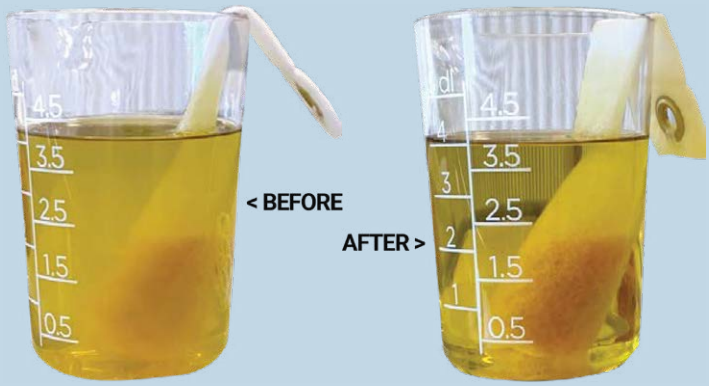

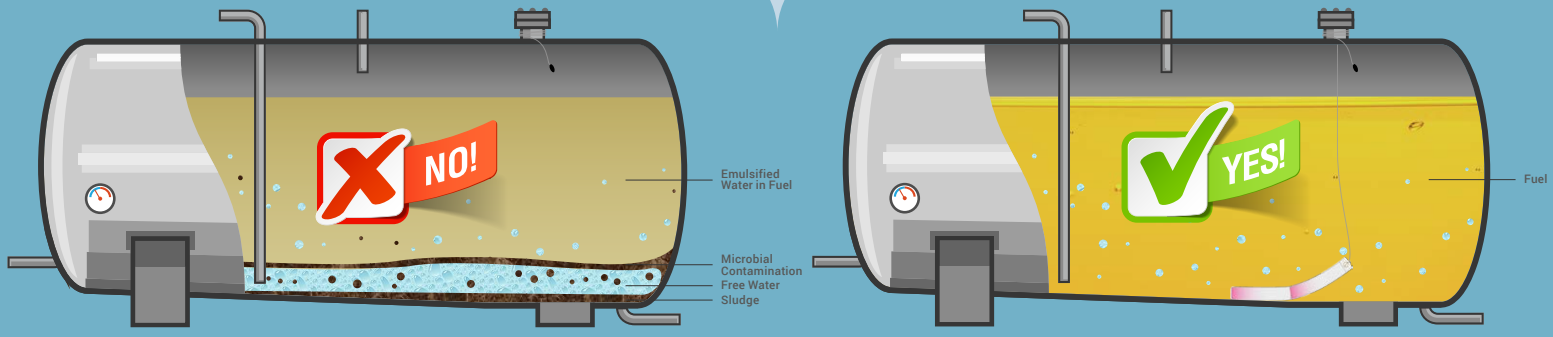

WATER IS THE ENEMY OF STORED FUEL

Aquafighter® will protect your fuel and tank from excess water that is generated over time.

Presence of water in a diesel tank is inevitable. This is an everyday battle, independent of tank size and where ever you are in the world. Free and entrained water is generated in your tank through air condensation, fuel supply, ineffective filtration, leaks, accidents and improper system design. When water is allowed to accumulate in your tank it provides the conditions for Microbial Contamination ("diesel bug") to grow, leading to significant problems including blocked filters, pump damage, engine failures, tank corrosion and poor fuel efficiency.

HOW DOES AQUAFIGHTER® WORK IN THE FUEL TANK?

- Demulsifies water by physico-chemical adsorption of water molecules to less than 65ppm total fuel water content with maximum efficiency. (**Aquafighter®** causes water to release naturally from fuel and it achieves this without adding to or altering the fuel, unlike certain fuel additives would do. After market additives can cause corrosion themselves)
- Attracts & Captures water immediately upon release from the fuel molecules
- Isolates water in its protective gel to permanently segregate it from the fuel & tank environment so your fuel & tank is protected at all times. (**Aquafighter®** will encapsulate the water preventing corrosion, microbial growth & re-emulsification until it is removed from the tank)

Aquafighter® tank opening & product fit guide



Tank Capacity	0-100 L	100-500 L	500-1000 L	1000-1500 L	1500-2000 L	2000-5000 L	5000-10000 L	10000-15000 L	15000-20000 L	20000-30000 L	30000+ L
Tank Opening	0-25 US gal	25-125 US gal	125-250 US gal	250-400 US gal	400-525 US gal	525-1250 gal	1250-2500 gal	2500-4000 gal	4000-5250 gal	5250-8000 gal	8000+ gal
38-90mm 1.5-3.5”	**Finger** (0-12 months)										
50-100mm 2-4”	**Finger** (0-12 months)	**Snake** (0-12 months)	**Snake** (0-6 months) **Twin Snake** (0-12 months)	**Snake** (0-4 months) **Twin Snake** (0-8 months) **Triple Snake** (0-12 months)	**Snake** (0-3 months) **Twin Snake** (0-6 months) **Triple Snake** (0-9 months) **Quad Snake** (0-12 months)						
90-150mm 3.5-6”	**Anaconda** (0-24 months)					**Anaconda** (0-12 months)	**Anaconda** (0-6 months) **Twin Anaconda** (0-12 months)	**Anaconda** (0-4.5 months) **Twin Anaconda** (0-9 months)	**Anaconda** (0-3 months) **Twin Anaconda** (0-6 months)		
▼▼▼ SPECIAL ORDER PRODUCTS ▼▼▼											
150-300mm 6-12”	**Medium Canvas** (0-12 months) **Large Canvas** (0-24 months)					**Medium Canvas** (0-6 months) **Large Canvas** (0-12 months)	**Large Canvas** (0-6 months)	**Large Canvas** (0-4.5 months)	**Large Canvas** (0-3 months)		
300-600mm 12-24”	**Large Canvas** (0-24 months)					**Large Canvas** (0-12 months)	**Large Canvas** (0-6 months)	**Large Canvas** (0-4.5 months)	**Large Canvas** (0-3 months)	**Fuel Station Mat** (0-12 months)	**2+ Fuel Station Mats** (0-12 months)
600mm+ 24”+							**Fuel Station Mat** (0-24 months)				
							Depot				

- Check the opening size of the tank first, and then the capacity of the tank. Choose an Aquafighter that suits your maintenance schedules.
- The period shown is the maximum time that the Aquafighter should be left in place between changes.
- Ensure you check periodically that the Aquafighter has not become saturated, particularly after first time use.
- Avoid leaving in place when fuel tank is in motion, particularly where the Aquafighter might block the fuel intake.
- These are estimates and needs could differ based on fuel quality, tank conditions and fuel quantity.

999.020 **Finger**



999.026 **Snake**




999.027-1 **Twin Snake**




999.027-2 **Triple Snake**



999.027-3 **Quad Snake**



999.028 **Anaconda**



999.040 **Twin Anaconda**



999.021 **Medium Canvas**



999.022 **Large Canvas**



999.042 **Fuel Station Mat**




999.030 **Depot**



999.023 **Refillable Dipstick Indicator**



999.024 **Dipstick Indicator Refills**



FUELSTAT®

- The ultra-simple test for Microbial Contamination in fuel
- 15 minutes to result as opposed to 4-7 days!
- ‘Test at the tank’ technology - no laboratory required



Conidia Bioscience Ltd

Unit 6 Surrey Technology Centre,
40 Occam Road, Guildford,
Surrey, GU2 7YG, UK
+44 (0)1491 829102
info@conidia.com

Conidia Bioscience

WWW.CONIDIA.COM

Conidia Bioscience Inc

15 Briarwood Ln, Dover,
NH, 03820, USA
+1 844 438 3578
info@conidia.com