SELF SERVICE MC

FEATURES

- **MULTI-USER MANAGEMENT**
- **WATER CAPTOR FILTER**
- **ALL-IN-ONE EQUIPMENT**
- **COMPACT DESIGN**
- **COMPATIBLE WITH SSM AGILIS SOFTWARE**
- **IP55**

The PIUSI SELF SERVICE MC is a complete device suitable to fit all diesel dispensing needs. With its sturdy structure, this dispenser is equipped with a high capacity vane pump, built-in bypass, automatic nozzle, water captor filter and electronic panel able to manage up to 80 users and 255 transactions.

PERFORMANCE

UP TO 90 L/MIN	AC
FLOW RATE	POWER
± 0,5%	UP TO 250
ACCURACY	USERS

Upgrade your MC hardware to B.SMART with KIT UPGRADE 1.0/2018.

ELECTRONIC METER INTEGRATED

SELF SERVICE MC

PACKAGING

CODE	WEIGHT		PACKAGING			N. BOXES / EUROPALLET	
	KG	LBS	MM	INCH	PCS/BOX	✈	🚢
COLUMN VERSION							
F0073801E	67	148	1478X488X400	-	1	6	4
F0074101E	75	165	1478X488X400	-	1	6	4
TANK VERSION							
F00738B0E	57	126	1080X488X400	-	1	6	4
F00741B0E	65	143	1080X488X400	-	1	6	4

| ANY BIODIESEL | AIR | ANTIFREEZE | AdBlue® | BIODIESEL | **D** DIESEL | FOOD | GASOLINE | GREASE | KEROSENE | OIL | WATER | WINDSCREEN |

CHART

E120 / PANTHER 72

Q = FLOW RATE (liter/min) vs P = TOTAL PRESSURE (bar)

- - - E120
——— PANTHER 72

| TYPE OF FLUID | DIESEL |
| TEMPERATURE | 20°C |

IN THE BOX
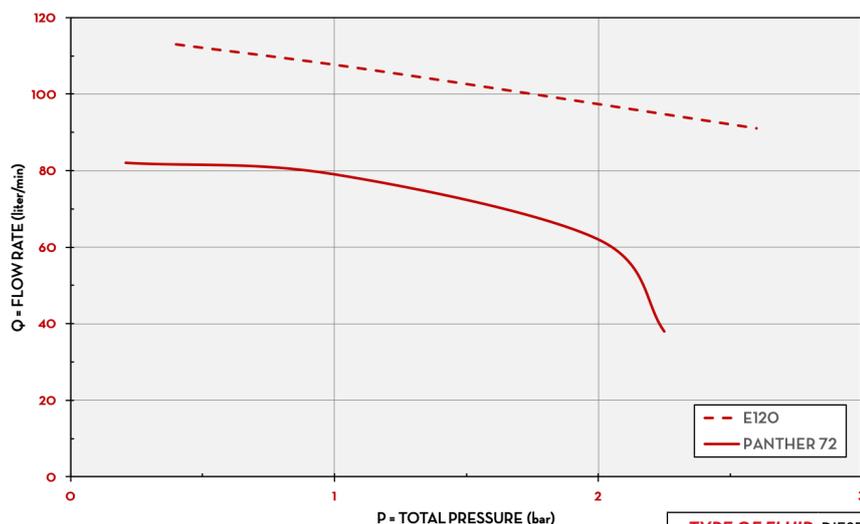
- SELF SERVICE MC DISPENSER
- DELIVERY HOSE
- AUTOMATIC NOZZLE
- INSTRUCTION MANUAL

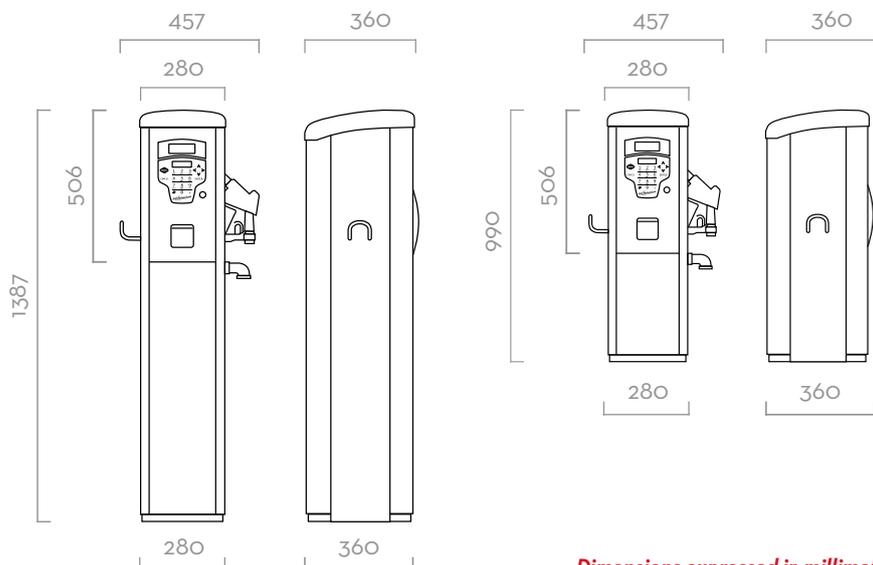## DETAILS

TANK VERSION AVAIVLABLE

WATER CAPTOR FILTER

DRIVER KEY (not included)

AGILIS SELFSERVICE MANAGEMENT

SSM AGILIS SOFTWARE

MATERIALS

- **PUMPS:**
  PANTHER 72 / E120
- **METER:**
  K600/3
- **NOZZLE:**
  AUTOMATIC NOZZLE
- **FILTER:**
  WATER CAPTOR

DIMENSIONS

457 / 360 / 280 / 506 / 1387 / 280 / 360

457 / 360 / 280 / 506 / 990 / 280 / 360

Dimensions expressed in millimeters

TECHNICAL DATA

| CODE | DESCRIPTION | FLUIDS TYPE | FLOW RATE | | VOLTAGE | | | PUMP | METER | NOZZLE | FILTER | | INLET | HOSE LENGTH | PC |
			L/MIN	GPM	AC V./HZ DC VOLT	POWER WATT	AMP. MAX.	TYPE	TYPE	TYPE	H2O FILTER	FILTERING CAPACITY	BSP	METERS	CONNECTION
COLUMN VERSIONS															
F00738O1E	SELF SERVICE 70 MC 230V/50HZ AGILIS	D	70	18	230/50	800	3.9	PANTH 72	K600	A80	SI	30µ	1" 1/2	4	SI
F0074101E	SELF SERVICE 100 MC 230V/50HZ AGILIS	D	90	24	230/50	1100	5.5	E 120	K600	A120	SI	30µ	1" 1/2	4	SI
TANK VERSIONS															
F00738B0E	SELF SERVICE TANK 70MC 230V AGILIS	D	70	18	230/50	800	3,9	PANTH 72	K600	A80	NO	-	1" 1/2	4	SI
F00741B0E	SELF SERVICE TANK100MC 230V AGILIS	D	90	24	230/50	1100	5,5	E 120	K600	A120	NO	-	1" 1/2	4	SI

UPON REQUEST IT IS AVAILABLE WITH DIFFERENT VOLTAGES AND 60 HZ FREQUENCY